

# Task: BAZ

## Marketplace



Maratona de Programação, Day 5. Available memory: 128 MB.

31.01.2015

Little Bytec spends his holidays with his grandmother. Every morning she goes to the marketplace to buy various products. The boy quickly noticed an interesting regularity: every day his grandmother spends an amount expressed by an odd integer on her shopping. Bytec soon found out that this regularity is characteristic to all Byteonian grandmothers.

Every day the grandmother buys not more than one item of each of the  $n$  products available in the market. Thrifty grandmother does not want to do her shopping carrying too much money with her. One day she asked Bytec for a hint of how much money she needs to take, in case she wants to purchase exactly  $k$  products. Unfortunately, Bytec does not know which products grandmother wants to buy, so the amount taken must be sufficient for any  $k$  items (and that their total cost would be an odd number). The same situation repeated itself several times. Bytec then decided to approach the problem methodically and write a program that, provided all the prices of products available on the market, will answer grandmother's questions.

### Input

The first line of the input contains one integer  $n$  ( $1 \leq n \leq 1\,000\,000$ ), specifying the number of products available at the market. The second line contains  $n$  integers from the range  $[1, 10^9]$ , specifying the prices of individual products. The third line contains one integer  $m$  ( $1 \leq m \leq 1\,000\,000$ ) specifying the remaining number of days that Bytec will stay at grandmother's place. Each of the following  $m$  lines contains one integer  $k_i$  ( $1 \leq k_i \leq n$ ), specifying the number of products that grandmother is going to buy on a given day.

### Output

Your program should output  $m$  lines. In the  $i$ -th line (for  $i = 1, \dots, m$ ) one integer should be written, indicating the maximum total odd price for  $k_i$  products. In case it is not possible to determine  $k_i$  products, such that their total price would be represented by an odd number, the  $i$ -th output line should contain the number  $-1$ .

### Example

For the input data:

```
4
4 2 1 3
3
2
3
4
```

the correct result is:

```
7
9
-1
```

# Task: BUD

## The Construction



Maratona de Programação, Day 5. Available memory: 128 MB.

31.01.2015

Byteasar would like to construct a racetrack in Byteotia. In gathering the funds necessary for the construction, he competes with Bytemon, who would prefer building a ski jump. Both projects are expensive, so Byteasar and Bytemon try to persuade The King of Byteotia for a donation.

The king must now choose one of the two options: either to provide funding for the racetrack or for the ski jump. For this purpose he would seek advice of the Chief Adviser, who is the head of the hierarchy of king's counsellors. Each counsellor is either an expert and provides his own recommendation, or leads a team of counsellors. Such a team leader recommends a decision, which is taken in accordance with the opinion of the majority of the members of his team. Fortunately, the number of counsellors in each team is odd. Therefore, the final decision depends only on the experts (i.e. counsellors not leading any of the teams). Each counsellor, with an exception of the Chief Adviser, has exactly one superior above him.

Byteasar and Bytemon are not waiting idly. They try to convince the experts to their case. It is not a simple task — persuading one expert takes exactly one day. When the expert is convinced there is no possibility he will change his opinion. It may happen that some of the experts at the very beginning already have a definite opinion that will not be changed.

Every day at dawn Byteasar selects one undecided expert and visits him in order to convince him. Bytemon does not like to get up so early, and so he selects an expert whom he wants to convince a bit later (and thus he loses a chance to convince the expert who already is busy, being persuaded by Byteasar). Rivals operate until all the experts would have a definite opinion. Byteasar and Bytemon know the hierarchy of the king's counsellors. Can Byteasar plan his lobbying activities in such a way that the Chief Adviser recommends the construction of the race track, regardless of how Bytemon would proceed?

## Input

The first line of the input contains one integer  $n$  ( $2 \leq n \leq 1000$ ), specifying the number of counsellors. The counsellors are numbered from 1 to  $n$ . The counsellor numbered 1 is the Chief Adviser.

In the  $i$ -th of  $n$  following lines there is a description of the  $i$ -th counsellor. It starts with an integer  $c_i$  ( $-2 \leq c_i \leq n$ ). If  $c_i \leq 0$ , the described counsellor is an expert (and his description consists only of number  $c_i$ ). Values of  $-2$ ,  $-1$  and  $0$  indicate that he is, respectively, in favour of building the racetrack, in favour of building the ski jump, or undecided. When  $c_i \geq 1$ , the number  $c_i$  is odd, indicating that the adviser  $i$  leads a team of counsellors consisting of  $c_i$  members. Team member numbers are sequentially given in the following part of the line. Each counsellor with a number greater than 1 belongs to exactly one team.

## Output

If Byteasar cannot convince the experts that the Chief Adviser recommends the construction of the racetrack, your program should print one output line containing the word NIE (Polish for *no*). Otherwise, your program should produce two lines. The first one should contain the word YES (Polish for *yes*), followed by the integer  $d$ , which states in how many ways Byteasar can choose an expert to be convinced on the first day, in order to be certain that when making optimal decisions in the following days, a favourable recommendation of the Chief Adviser would be obtained. The second line should contain a sequence of  $d$  numbers of these very experts, in the *increasing* order. If, at the beginning, all the experts have definite opinions (and the recommendation of the Chief Adviser is beneficial to Byteasar), the program should print  $d = 0$ .

## Example

For the input data:

```
4
3 2 3 4
-2
0
-1
```

the correct result is:

```
TAK 1
3
```

# Task: GRA

## Game of Doubling



Maratona de Programação, Day 5. Available memory: 128 MB.

31.01.2015

*Game of Doubling* is actually more a puzzle than a game. The game board is a rectangle divided into fields that are unit squares. At the beginning, some fields contain a token, and some do not.

The player's objective is to gather a highest number of tokens in a single field. The only possible move is to locate two fields adjoining sides that contain the same (positive) number of tokens and transfer all tokens from one of these fields onto the other.

Write a program that for a given initial board configuration, would determine for each field the maximum number of tokens a player could accumulate in this field.

### Input

The first line of the input contains two integers  $n$  and  $m$  ( $1 \leq n, m \leq 200$ ), specifying the number of rows and number of columns of the board. Each of the following  $n$  lines contains a sequence of  $m$  digits: 0 or 1. The digit 1 indicates a field containing a token, and the digit 0 indicates an empty field.

### Output

Your program must output  $n$  lines each containing  $m$  integers. The  $j$ -th number in the  $i$ -th row should indicate the maximum number of tokens that a player could accumulate on the field located at the intersection  $i$ -th row and  $j$ -th column, starting from the given initial configuration.


### Example

For the input data:

```
3 4
0111
1011
1011
```

the correct result is:

```
0 2 4 4
2 0 4 4
2 0 4 4
```

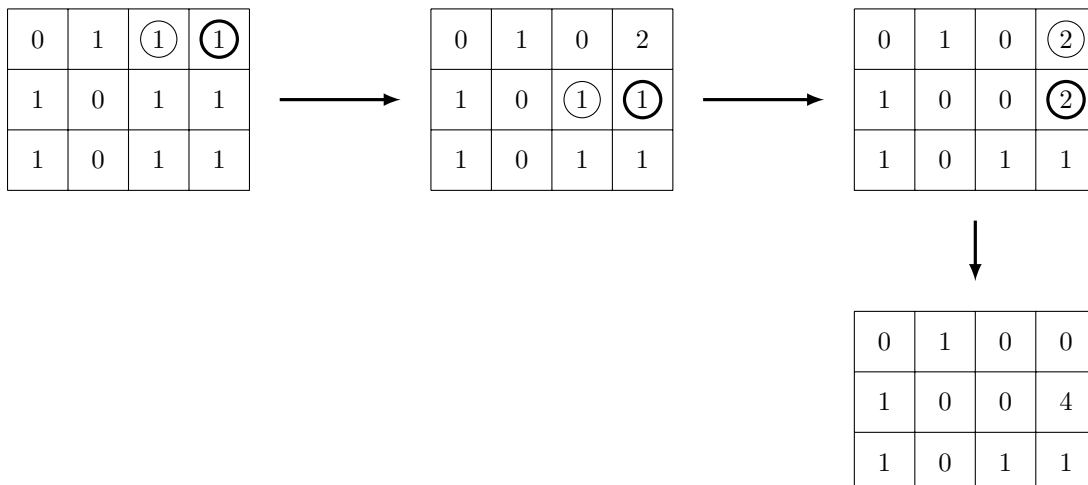

**Explanation of the example:** The above picture explains how to collect 4 tokens at a field positioned at the intersection of the middle row and the last column.

# Task: KRO

## The Kingdom



Maratona de Programação, Day 5. Available memory: 128 MB.

31.01.2015

In Bytectoria there are  $n$  cities and even number of bidirectional roads connecting the cities. The road network allows commuting between any two cities of the kingdom.

King Bythor, the ruler of Bytectoria, is known for his passion for even numbers. When he realized that there are cities in his kingdom, which are a starting point of an odd number of roads leading out, he immediately demanded the expansion of the road network.

King's Adviser knows the Bytectoria finances well, and knows that the implementation of such a serious investment would make organization of the Winter Olympic Games impossible, very much expected by the Bytettoriian people. He plans to convince the King that Bytectoria has enough "even" values in order to ask for a postponement of investment decision until the next year.

Firstly, the advisor would surprise the king by the fact that there is an even number of cities in Bytectoria with an odd number of outgoing roads. Then he plans to divide these cities into pairs, and for each of such created pairs  $(u, v)$  assign the route from  $u$  to  $v$ , consisting of an even number of roads. To further impress the king, no road would appear more than once on the way from  $u$  to  $v$ . Furthermore, no Bytettoriian road will be included in more than one of the designated routes.

The advisor is certain that such argumentation will convince the king. However, he is unable to cope with the actual routes design, so he asked you for help.

## Input

The first line of the input contains two integers  $n$  and  $m$  ( $2 \leq n, m \leq 250\,000$ ). They specify the number of cities and the number of roads in Bytectoria, respectively;  $m$  is an even number.

Each of the subsequent  $m$  lines contains two integers  $a, b$  ( $1 \leq a, b \leq n, a \neq b$ ) indicating that the cities  $a$  and  $b$  are connected by a bidirectional road. Between any two cities there exists not more than one road. It can be assumed that there exists a city, which is a starting point to an odd number of roads.

## Output

By  $k$  we denote the number of cities which are a starting point to the odd number of roads (the advisor is certain that  $k$  is an even number).

If it is not possible to determine routes according to adviser's plan, the only line of output should contain the word NIE (Polish for *no*).

Otherwise, the program should output  $\frac{k}{2}$  descriptions of designated routes. Each of the route's descriptions should consist of two lines. The first line of  $i$ -th description should contain three integers  $u_i, v_i, l_i$  ( $2 \mid l_i$ ) indicating that the route begins at city  $u_i$ , ends at city  $v_i$  and consists of  $l_i$  roads. The second line of  $i$ -th description should contain  $l_i$  integers denoting the numbers of the consecutive roads on the route.

The roads are numbered from 1 to  $m$ , according to the order in which they were given at input. In case there are multiple solutions, your program can output any one of them.

## Example

For the input data:

```
6 8
1 2
2 3
3 4
4 5
5 6
6 1
1 4
2 5
```

the correct result is:

```
1 5 6
1 2 3 7 6 5
2 4 2
8 4
```

# Task: MAT

## The Matrix



Maratona de Programação, Day 5. Available memory: 128 MB.

31.01.2015

Byteotian Printing Factory (BPF) has received a large production order for striped wallpaper. Striped wallpaper is the hit of the season in interior design. Each wallpaper has  $n$  coloured vertical stripes of equal width. BPF is to take care of the design and printing of wallpapers. The customer described the colour of certain wallpaper stripes. In the case of other stripe colours, the customer allowed BPF a complete freedom.

In the production of wallpapers BPF use matrices to print a certain number of consecutive stripes on the wallpaper. The matrix has a specific colour of each of the printed stripes. The matrix may be shorter than the entire wallpaper. If the matrix consists of  $k$  stripes it is applied in *all*  $n - k + 1$  possible positions where its stripes align with the wallpaper stripes, each time printing all the matrix stripes. In this way, a single wallpaper stripe can be printed over more than once. In case a given stripe is printed over using various colours, the final colour is a blend of these colours.

BPF employees, irrespective of their sense of aesthetics, would primarily like to design the shortest possible matrix that will allow printing the entire wallpaper. They must bear in mind that in the case of stripes defined by the customer they must use pure colour, without any addition of any other colour. In other words, each matrix application printing over such a single colour stripe, the matrix stripe colour must be exactly as defined by the client.

### Input

The only line of the input contains a string composed of upper case letters of English alphabet and stars (\*), specifying the desired appearance of the wallpaper. The letters represent different colour stripes, while the stars indicate stripes of the colour not specified by the client. The length of the character string  $n$  satisfies  $1 \leq n \leq 1\,000\,000$ .

### Output

Your program should output a single line containing a single integer  $k$ : the minimum matrix length, which would enable printing the desired wallpaper.

### Example

For the input data:

A\*B\*B\*A

the correct result is:

6

**Explanation of the example:** The matrix of length 6 which enables printing the wallpaper presented at the input (composed of seven stripes) is ABBBBBA.

# Task: WYK

## The Carpet



Maratona de Programação, Day 5. Available memory: 128 MB.

31.01.2015

Byteasar is visiting a carpet store looking at a certain carpet. Unfortunately, some fragments of the carpet are looking quite bad, due to factory defects. Because Byteasar would like to buy a substantial amount of the floor covering, he decided to allow himself to buy carpet with no more than one faulty spot. He will cover such a defect with a large flower-pot and the problem would be gone.

For simplicity, the carpet available in the store is represented as a rectangle with a height of  $h$  and width  $w$ , divided into  $h \times w$  squares of size  $1 \times 1$ . We know whether each carpet square has a defect, or not. Byteasar would like to buy a rectangular carpet piece which is as large as possible, consisting of square units, wherein at most one square is faulty. What is the area of such a piece?

### Input

The first line of the input contains two integers  $h$  and  $w$  ( $1 \leq h, w \leq 2000$ ), specifying respectively the height and width of the carpet available in the store. Subsequent  $h$  lines describe the carpet. Each of these lines contains a string of  $w$  characters `.` (square without faults), and `#` (faulty square), describing the individual carpet squares.

### Output

Output the maximum area of a rectangular piece of the carpet, which consists of unit squares and has at most one defective square.

### Example

For the input data:

```
4 5
#.#..
....#
..#..
....#
```

the correct result is:

```
12
```

# Task: ZAD

## The Task



Maratona de Programação, Day 5. Available memory: 128 MB.

31.01.2015

Byteasar is busy preparing a task for a programming contest. Has has already written a sketch of the content:

*There are  $n$  cities in Byteotia, connected by  $n - 1$  bidirectional roads in such a way that using the road network it is possible to drive between any two of the cities. It takes one hour to cover the distance between two directly connected cities. Cities are numbered from 1 to  $n$ . The number of inhabitants living in the city  $i$  is equal to  $a_i$ .*

*Next year elections are to be held in Byteotia. In order to have a full control over the conduct of the voting process, the King of Byteotia decided that the vote will be held in one city only. All Byteotian residents are to go to the city, where the ballot will be held, using the the shortest way, and they would vote there. Now all that remains is to choose the city where the voting will take place. This choice depends on many factors. In particular, for each city  $i$ , we would like to calculate the total time required by all Byteotian residents to reach the city  $i$  (we indicate this value by  $b_i$ ).*

Byteasar had already prepared an extremely difficult set of tests to the task, but accidentally lost half of the data. Now, all that remained out of each test were only the descriptions of road connections and output files containing the  $b_i$  values. On this basis, he would like to restore the data concerning the population of each Byteotian city.

## Input

The first line of the input contains an integer  $n$  ( $2 \leq n \leq 300\,000$ ), specifying the number of Byteotian cities. Each of the following  $n - 1$  lines contains a description of one road connection in the form of a pair of integers  $x_i, y_i$  ( $1 \leq x_i, y_i \leq n$ ). They indicate that the cities  $x_i$  and  $y_i$  have a road connection. The subsequent line contains a sequence of  $n$  integers  $b_i$  ( $0 \leq b_i \leq 10^9$ ).

## Output

Produce a single line containing a sequence of  $n$  integers  $a_i$ . The number  $a_i$  should indicate the population of Byteotian city number  $i$ . After solving Byteasar's exam task, for a given string  $a_i$  we should receive string  $b_i$  provided at the input.

The input data are selected in such a way that a solution always exists. In case there are many correct solutions, your program can output any one of them.

## Example

For the input data:

```
2
1 2
17 31
```

the correct result is:

```
31 17
```

# Task: ZAR

## Light Bulbs



Maratona de Programação, Day 5. Available memory: 128 MB.

31.01.2015

Finishing jobs at Byteasar's new home are ending shortly. All that remains is to install new light bulbs in each of the  $n$  rooms. The minimum bulb power rating has been determined for each of the rooms, to provide sufficient illumination.

Byteasar bought  $n$  light bulbs, but now he noticed that they do not meet fully his expectations. It may not be possible to provide all rooms with an adequate illumination, and it is also possible that maybe some bulbs unnecessarily have too high power rating. Byteasar then decided to go to the store and replace some of the bulbs, so to be able to sufficiently illuminate all the rooms, and at the same time minimize the total power of the light bulbs. The shop has light bulbs available in all power ratings expressed by a positive number. Byteasar's backpack capacity allows him to take no more than  $k$  bulbs to be replaced, which is therefore the maximum number of light bulbs that he is ready to replace.

Help Byteasar to choose which bulbs should be replaced, so that all the rooms are adequately lit, and at the same time to minimize the total power of light bulbs.

## Input

The first line of the input contains two integers  $n$  and  $k$  ( $1 \leq k \leq n \leq 500\,000$ ), specifying the number of rooms (this is also the number of light bulbs) and the number of light bulbs that can be fitted in Byteasar's backpack. The rooms are numbered from 1 to  $n$ . The second line of the input contains  $n$  integers  $p_1, p_2, \dots, p_n$  ( $1 \leq p_i \leq 10^9$ ), specifying power ratings of the light bulbs which currently are at Byteasar's disposal. The third line of input contains  $n$  integers  $w_1, w_2, \dots, w_n$  ( $1 \leq w_i \leq 10^9$ ), specifying the illumination requirements concerning the subsequent rooms: the room  $i$  should be fitted with a bulb with bearing a minimal rating of  $w_i$ .

## Output

In case it is not possible to replace at most  $k$  bulbs in order to have all the rooms sufficiently illuminated, your program should output **NIE** (Polish for *no*). Otherwise, an integer should be written indicating the minimum total power of all light bulbs used to illuminate the home after exchanging at most  $k$  bulbs.

## Example

For the input data:

```
6 2
12 1 7 5 2 10
1 4 11 4 7 5
```

the correct result is:

```
33
```

**Explanation of the example:** It is enough to replace the bulb with a power rating of 2 with a bulb bearing a power rating of 4, and the bulb with a power rating of 10 with one rated 4. Then almost all the rooms will have a light bulb installed of exactly such power rating as being a minimum requirement. The exception would be a room that would have been illuminated adequately with the bulb with the power rating of 11, which will be illuminated by a bulb rated 12.